

<b>Specification</b>	<b>AXQCM610C</b>	Rev.: 1	Date: 2020-10-04
----------------------	------------------	---------	------------------


## Quartz Crystal Microbalance Element (Monitor Crystal)



Parameter	min.	typ.	max.	Unit	Condition
Nominal frequency		6.000		MHz	
Adjustment frequency		5.985		MHz	
Crystal cut		SC			
Overtone		1			
Frequency tolerance	-7		+7	kHz	
Frequency stability					
Over operating temperature range	-50		+50	ppm	
Resonance resistance $R_r$			15	$\Omega$	
Motional capacitance $C_1$				fF	
Shunt capacitance $C_0$			20	pF	
Drive level		100		$\mu$ W	
Operating temperature range	+60	+70	+80	$^{\circ}$ C	
Storage temperature range	-40		+105	$^{\circ}$ C	
QCM diameter	13.97 +0/-0.03			mm	Plano-convex
Convex radius R	210			mm	
Blank surface quality	Fine lapped				$R_a = 0.8 \sim 1.6 \mu\text{m}$
Electrode diameter Side A	13.0 $\pm$ 0.1			mm	Fully plated
Electrode material Side A	Al				
Electrode diameter Side B	6.4 $\pm$ 0.1			mm	See drawing
Electrode material Side B	Al				

Side A (Plane)

Side B (Convex)

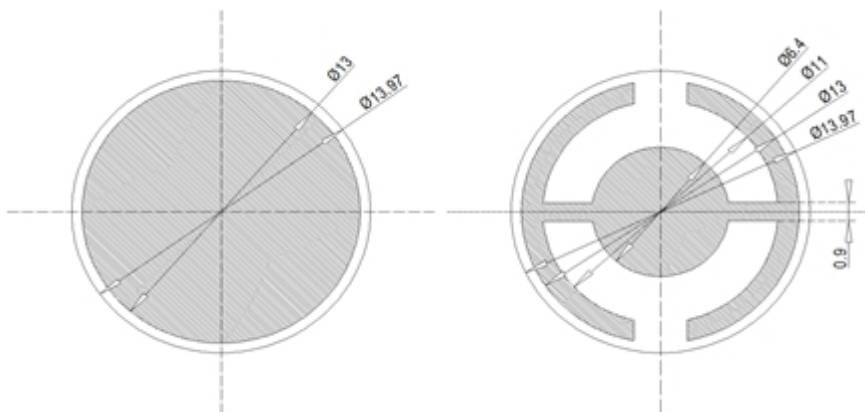

### Ordering Code:

Model (Specification)	Revision	Frequency [MHz]
AXQCM610C	1	5.985

**Revision History**

Rev.	Drawing	Date [dd.mm.yyyy]	Remarks	Author	Checked
1	D0	04.10.2020	First issue AXQCM610c	BN	BN