


Specification	AXQCM601A, AXQCM601B	Rev.: 1	Date: 2020-10-04
---------------	----------------------	---------	------------------


## Quartz Crystal Microbalance Element (Monitor Crystal)



Parameter	min.	typ.	max.	Unit	Condition
Nominal frequency	6.000			MHz	
Adjustment frequency	5.993			MHz	
Crystal cut	AT				35°15'±1'
Overtone	1				
Frequency tolerance	-2		+2	kHz	
Frequency stability					
Over operating temperature range	-50		+50	ppm	
Resonance resistance R <sub>r</sub>			11	Ω	AXQCM601A
			15	Ω	AXQCM601B
Motional capacitance C <sub>1</sub>				fF	
Shunt capacitance C <sub>0</sub>				pF	
Drive level	100			μW	
Operating temperature range	+60	+70	+80	°C	
Storage temperature range	-40		+105	°C	
QCM diameter	13.97 +0/-0.03			mm	Plano-convex
Convex radius R	210			mm	
Blank surface quality	Fine lapped				R <sub>a</sub> = 0.8 ~ 1.6 μm
Electrode diameter Side A	13.0 ± 0.1			mm	Fully plated
Electrode material Side A	Cr-Au				
Electrode diameter Side B	6.4 ± 0.1			mm	See drawing
Electrode material Side B	Cr-Au				

Side A (Plane)

Side B (Convex)

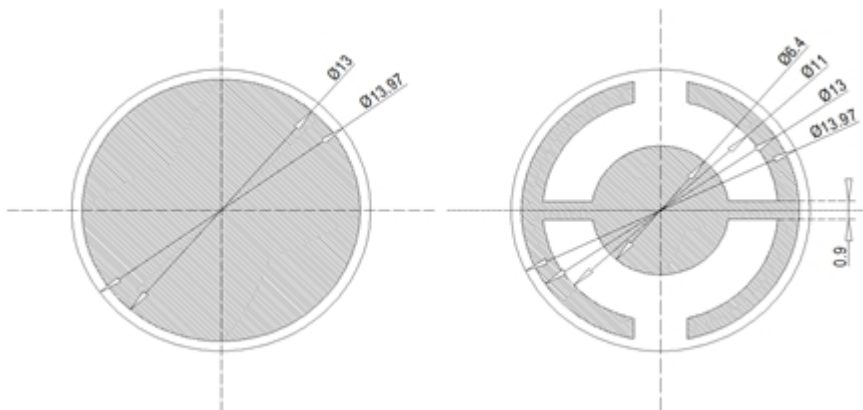

### Ordering Code:

Model (Specification)	Revision	Frequency [MHz]
AXQCM601A	1	5.993
AXQCM601B		

**Revision History**

Rev.	Drawing	Date [dd.mm.yyyy]	Remarks	Author	Checked
1	D0	04.10.2020	First issue AXQCM601A,B	BN	BN