


Specification	AXQCM609B	Rev.: 1	Date: 2020-09-25
---------------	-----------	---------	------------------

Quartz Crystal Microbalance Element (Monitor Crystal)




Parameter	min.	typ.	max.	Unit	Condition
Nominal frequency		6.000		MHz	
Adjustment frequency		5.985		MHz	
Crystal cut		AT			35°15'±1'
Overtone		1			
Frequency tolerance	-7		+7	kHz	
Frequency stability					
Over operating temperature range	-50		+50	ppm	
Resonance resistance R _r			15	Ω	
Motional capacitance C ₁				fF	
Shunt capacitance C ₀			20	pF	
Drive level		100		μW	
Operating temperature range	+60	+70	+80	°C	
Storage temperature range	-40		+105	°C	
QCM diameter		13.97 +0/-0.03		mm	Plano-convex
Convex radius R		210		mm	
Blank surface quality		Fine lapped			R _a = 0.8 ~ 1.6 μm
Electrode diameter Side A		13.3 ± 0.1		mm	Fully plated
Electrode material Side A		Ni-Ag			
Electrode diameter Side B		6.0		mm	See drawing
Electrode material Side B		Ni-Ag			

Side A (Plane)

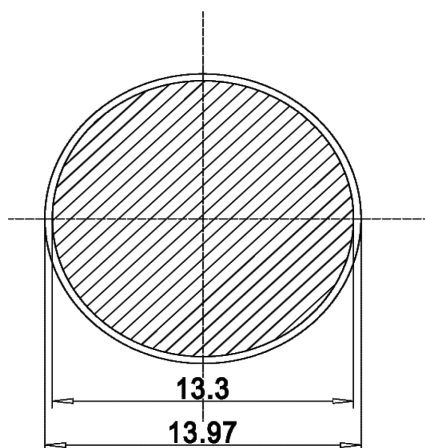

Side B (Convex)

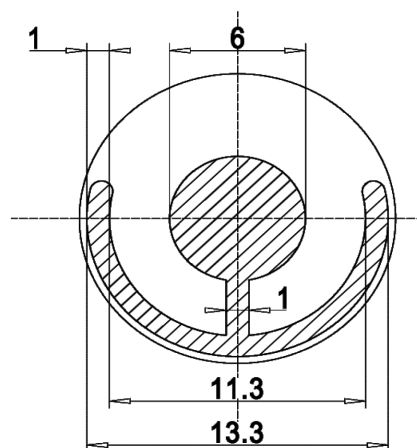

Ordering Code:

Model (Specification)	Revision	Frequency [MHz]
AXQCM609B	1	5.985

Revision History

Rev.	Drawing	Date [dd.mm.yyyy]	Remarks	Author	Checked
1	D0	25.09.2020	First issue AXQCM609B	BN	BN
1	D1	09.10.2020	Diameter tolerances changed, convex radius added	BN	BN