

<b>Specification</b>	<b>AXIOM260</b>	Rev.: 3	Date: 2020-06-22
----------------------	-----------------	---------	------------------

**Oscillator type: Low Phase Noise OCXO in Vibration-isolated Package**  
**→ NOT RECOMMENDED FOR NEW DESIGNS**

Parameter	min.	typ.	max.	Unit	Condition
<b>Frequency range</b>	60		125	MHz	
<b>Nominal frequencies</b>	100.000/120.000			MHz	
<b>Frequency stability</b>					
Initial tolerance @ +25°C			±300	ppb	@ V <sub>C</sub> = 5V
vs. operating temperature range			±300	ppb	
vs. supply voltage variation (pushing)			±20	ppb	V <sub>S</sub> ±5%
vs. load change (pulling)			±20	ppb	R <sub>L</sub> ±10%
Long term (aging) per day			±2	ppb	after 30 days operation
Long term (aging) 1 <sup>st</sup> year			±200	ppb	after 30 days operation
<b>Frequency adjustment range</b>					
Electronic Frequency Control (EFC)	±1			ppm	
EFC voltage V <sub>C</sub>	0	5	10	V	
EFC slope ( $\Delta f / \Delta V_C$ )	Positive				
EFC input impedance	100			k $\Omega$	
<b>RF output</b>					
Signal waveform	Sine wave				
Load R <sub>L</sub>	50			$\Omega$	±10%
Output level	+10			dBm	
Harmonics			-30	dBc	
Spurious			-90	dBc	
Warm-up time @+25°C			10	min	$\Delta f_{\text{final}}/f_0 < \pm 0.1 \text{ ppm}$
Phase noise under rest @ 100 MHz (Note 2)			-100 -130 -155 -160 -165	dBc/Hz dBc/Hz dBc/Hz dBc/Hz dBc/Hz	@ 10 Hz @ 100 Hz @ 1 kHz @ 10 kHz @ ≥100 kHz
Phase noise under random vibration	Consult factory				(Note 3)
G-sensitivity (Note 4)			0.1	ppb/g	per axis
<b>Supply voltage V<sub>S</sub></b>	11.4	12.0	12.6	V	
<b>Current consumption</b> (steady state)			400	mA	@ +25°C
<b>Current consumption</b> (warm-up)			800	mA	
<b>Operating temperature range</b>	-20		+70	°C	
<b>Enclosure (see drawing) (LxWxH)</b>	50x48x27			mm	
<b>Weight</b>			60	g	
<b>Packing</b>	Palette				

**Notes:**

1. Terminology and test conditions are according to IEC60679-1 and MIL-PRF-55310, unless otherwise stated
2. Better phase noise on request
3. Phase noise under random vibration depends on the vibration profile and level. Please consult factory
4. Overall G-sensitivity is a function of vibration frequency. Roll-off above 200 Hz.

### Absolute Maximum Ratings

Parameter	min.	max.	Unit	Condition
Supply Voltage $V_s$	-0.5	$V_s + 10\%$	V	$V_s$ to GND
Storage Temperature	-55	+125	°C	

### Ordering Code

Model	Revision	Frequency [MHz]
AXIOM260	Rev.3	100.000

Example: AXIOM260\_Rev.3 – 100.000 MHz

### Handling and Testing

Parameter	Procedure	Source
Handling and Testing	Application Note AXAN-011	www.axtal.com
Processing	Application Note AXAN-012	www.axtal.com

Parameter	Procedure	Condition
Electrostatic discharge (ESD)		
THD devices	IEC60749-26	HBM 2000 V
SMD devices	IEC60749-27	MM 200 V
Washable	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	
RoHS- Compliant	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No	



### Environmental conditions

Test	IEC 60068 Part ...	IEC 60679-1 Clause	MIL-STD-202G Method	MIL-STD-810F Method	MIL-PRF-55310D Clause	Test conditions (IEC)
Sealing tests (if applicable)	2-17	5.6.2	112E		3.6.1.2	Gross leak: Test Qc, Fine leak: Test Qk
Solderability	2-20	5.6.3	208H		3.6.52	Test Ta Method 1
Resistance to soldering heat	2-58		210F		3.6.48	Test Td <sub>1</sub> Method 2 Test Td <sub>2</sub> Method 2
Shock*	2-27	5.6.8	213B	516.4	3.6.40	Test Ea, 3 x per axes 100g, 6 ms half-sine pulse
Vibration, sinusoidal*	2-6	5.6.7.1	201A 204D	516.4-4	3.6.38.1 3.6.38.2	Test Fc, 30 min per axes, 10 Hz - 55 Hz 0,75mm; 55 Hz - 2 kHz, 10g
Vibration, random*	2-64	5.6.7.3	214A	514.5	3.6.38.3 3.6.38.4	Test Fdb
Endurance tests			108A			
- ageing		5.7.1			4.8.35	30 days @ 85°C, OCXO @25°C
- extended aging		5.7.2				1000h, 2000h, 8000h @85°C

Other environmental conditions on request


Data sheet is for information purposes only and may be subject to modifications or may be discontinued without notice.

Enclosure drawing

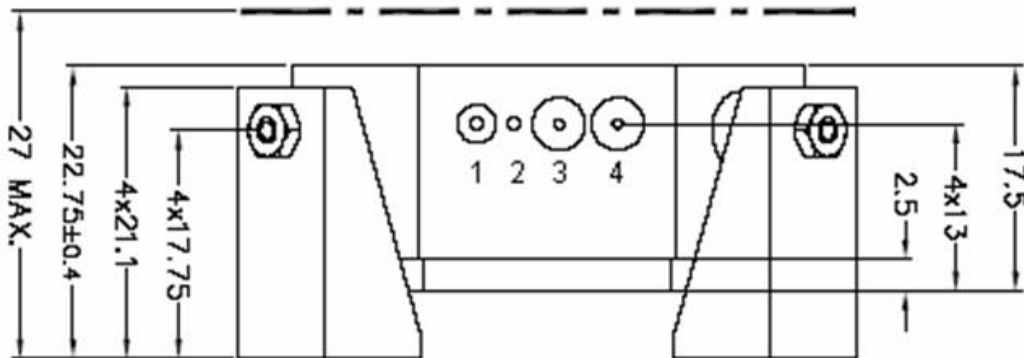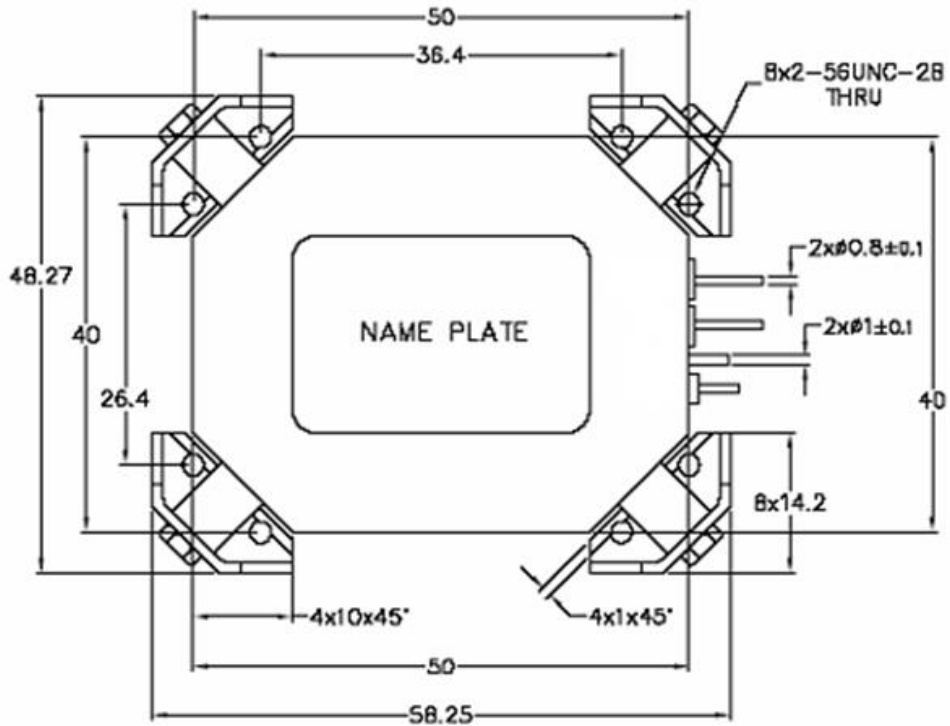

Pin connections

Pin #	Symbol	Function
1	RF OUT	RF Output
2	GND	Ground
3	V <sub>c</sub>	Control Voltage (EFC)
4	V <sub>s</sub>	Supply Voltage

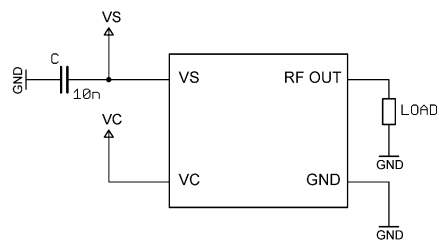

\* See Application Note AXAN-011

**Revision History**

<b>Rev.</b>	<b>Drawing</b>	<b>Date</b> [dd.mm.yyyy]	<b>Remarks</b>	<b>Author</b>	<b>Checked</b>
2	D0	01.10.2012	Major revision with screening option, editorial changes	BN	BN
3	D0	26.04.2014	Frequency range added, various parameters updated, environmental conditions updated, editorial changes	HH	HH
3	D1	22.06.2020	Life cycle note added	HH	HH